

PoE Plus Speed Dome IP Camera

ICA-HM620 / ICA-H652

Quick Installation Guide




Table of Contents


Verify the Contents Inside the Package Box	3
Physical Installation	4
Further Configuration	12




Verify the Contents Inside the Package Box

The package should contain the items below. If any item is missing or damaged, please contact the seller immediately.

		
Dome Camera with Dome Cover	Compact Pendent Mount	Outdoor Mount Kit

		
Waterproof Rubber	Terminal Block	Bracket Screw Kit

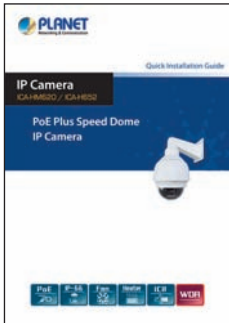		
Security Tool	Lubricant	M3/M5 Standard Screws M3/M5 Security Screws

		
Quick Installation Guide	CD-ROM	AC Power Adapter Power Cord

Physical Installation



Caution

1. Please take necessary precautions when installing the hardware to avoid damage to the device and injury to the installer.
2. Please make sure the hardware is fastened on the wall properly to avoid unnecessary accidents.
Double-check the hardware again after the installation.
3. Please check whether or not the power supply voltage is suitable for the device. The wrong power supply voltage will damage the device.

Step 1

Unpack the Dome Camera's package and take out the Dome Camera unit.



Step 2

Tighten the knob to remove the dome cover and the lens protector.



Step 3

Attach the dome cover to the camera body. Before doing that, apply some lubricant to the cover's water-proof rubber to make the installation process smoother.



Note

The tiny protrusion on the dome cover must align with one of the four holes on the dome body.

Step 4

Gently pressure the dome cover downward with two hands on the side of it.

DO NOT press the cover, as shown in the figure; this might cause damage to the camera body.




Step 5

Use the M3 screw to screw the dome cover and camera body together.




Step 6

Make a cable entry hole on the wall to recess the cables. Otherwise, users could push up the Cable Entry Board on the Compact Pendant Mount's Mounting Plate to place the cables, as shown in the photo on the right.

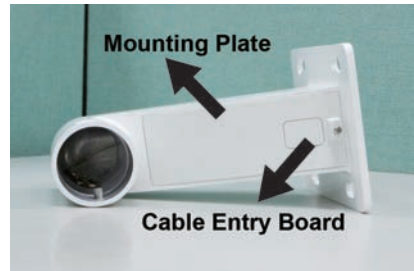

Step 7

Fix the Compact Pendant Mount on the wall with proper screws and screw anchors. After this step, attach the Waterproof Rubber to the Outdoor Wall Mount.

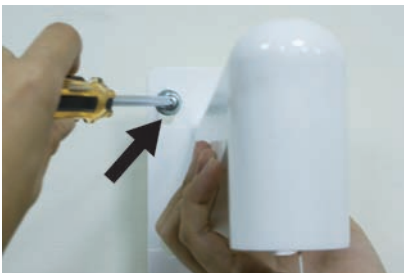

Note

The screws and screw anchors are not in the package.



Step 8

Pass the network and power cable through the Compact Pendant Mount



Note

1. The network cable is not in the package.
2. Please block the cable entry hole with the supplied sponge to avoid insects entering the Pendant Mount. The sponge can be placed in two ways as shown in the illustrations below.

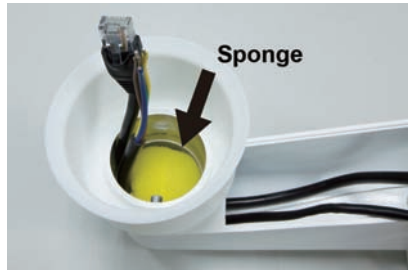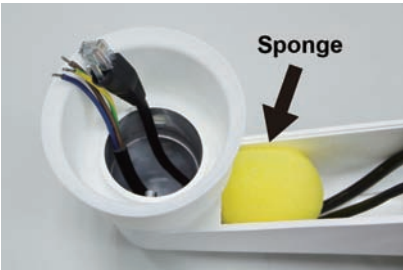


Step 9

Thread the cables through the Outdoor Mount Kit and join the Outdoor Mount Kit to the Compact Pendant Mount with the supplied screws and washers. Then adjust the Waterproof Rubber to the joint.



Step 10

Connect power wires of AC adapter with Power Input connector of data cable. Please check the color of power wire carefully, and screw that with connector properly.

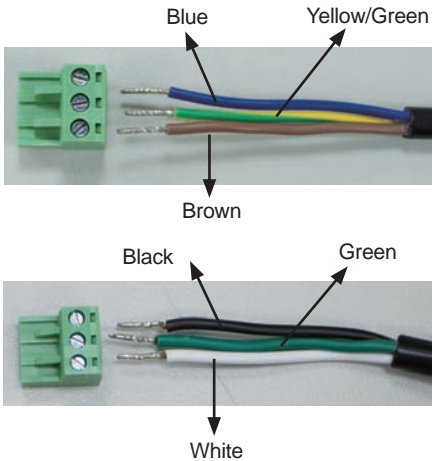

Caution

Wrong wiring could cause permanently damage to the device.

Step 11

Use the safety hook to hang the camera, and connect the cables to the Dome Camera.



Step 12

Assemble the Dome Camera to the Outdoor Mount Kit with the supplied M5 screw and washers.



Rotate the dome camera until the two screw holes match the dome camera with the outdoor mount kit.

Step 13

The adapter with the power cord attached is connected to a power outlet where the power voltage matches.


Voltage Switch



Use only the power adapter shipped with the unit to ensure correct functionality

Step 14

Connect the network cable with switch. The speed dome can be configured without external power if connected to IEEE 802.3at High Power over Ethernet (PoE plus) switch.

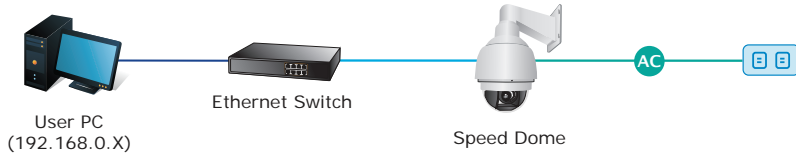

1. For ICA-HM620, if there is a need to operate the Heater, please plug the AC 24V cable into the Camera's Power Connector to power up the Camera instead. Heater can only be powered by the 24VAC adapter.
2. For ICA-H652, the Heater can be powered by the 24VAC adapter or 60-watt PSE device.

Step 15

Set your computer's IP address to 192.168.0.x, where x is a number between 1 and 253 (except 20 which is being used for the camera by default). If you don't know how to do this, please ask your network administrator.

Step 16

Use web browser (Internet Explorer 6.0 or above) to connect to **192.168.0.20** (type this address in the address bar of web browser).

You'll be prompted to input user name and password: **admin** and **admin**



Further Configuration

For the detailed configuration, please check user's manual on the bundled CD.

If you have any other question, please contact the dealer where you purchased this product or you can contact PLANET directly at the following email:

Email address: support@planet.com.tw