

**30FPS** | **802.11n Pocket Presentation Gateway**  
**WPG-130N**



**Quick Installation Guide**

**1. Package Contents**


Thank you for choosing PLANET WPG-130N. Before installing the device, please verify the contents inside the package box.

WPG-130N	Quick Guide	CD-ROM
Power Adapter	World-Wide Adapter Set (US/EU/UK)	VGA Adapter

**Note** If there is any item missed or damaged, please contact the seller immediately.

**2. Physical Installation**

Front Panel Description

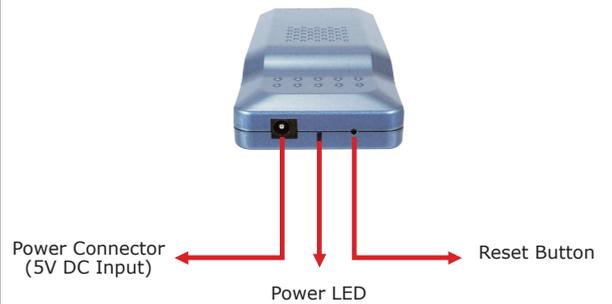

Rear Panel Description



**3. Hardware Installation**

**Step 1:** Please turn on your projector first, and connect the WPG-130N to the projector via VGA port. Now you can power on WPG-130N.



**Step 2:** When the projector shows the default screen as below, it indicates WPG-130N is ready now.



**4. Software Installation – Windows**

Default SSID: **WPG-130N**

**Step 1:** Site survey the wireless signal of WPG-130N, and connect your PC with it wirelessly.



\* The connection information can be found from the projector screen.

Default IP Address: **192.168.1.1**

**Step 2:** Open the web browser and it will redirect to WPG-130N home page automatically, or you can enter the default IP address 192.168.1.1 to access it.



**Step 3:** Download the client utility (WPG) of Windows 7/Vista/XP and execute it. After installing the program, you'll see WPG shortcut on your PC desktop.



## Addendum : Software Installation – Windows Mobile 5/6

- 1) First, make sure Wi-Fi function of your smartphone or PDA is enabled, and connect the Smartphone or PDA with WPG-130N.
- 2) Open the browser of the smartphone or PDA, and it would redirect to the WPG-130N web page (or you can enter the default IP address **192.168.1.1** to access it.). Download the MobiShow client software, and execute the installation program.
- 3) Open **"Programs"** on your smartphone or PDA, and select **"MobiShow"** icon to launch the client software.
- 4) The SSID of available access points will be listed on your smartphone or PDA. Select WPG-130N.



**Step 4:** Launch WPG on the desktop, and then input the login code. The login code can be found from the projector screen.




Note

Please make sure the firewall in Windows will allow the WPG software to pass through.

**Step 5:** Click the  button to start projection, or choose one of the numbers 1~4 to project to the split screen.



5) Input the login code displayed on the projector screen, and the following main menu will be shown on your phone.

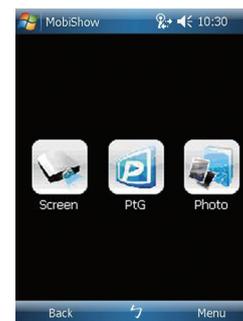

6) Select which feature to use. To project the screen of your phone, click on the **"Screen"** icon. To make a presentation, select the **"PtG"** icon. To project the photos from your phone, select the **"Photo"** icon.

### FURTHER INFORMATION :

The above steps introduce simple installations and configurations for WPG-130N. For further configurations of the utility (WPG), Virtual Extended Screen, and Wi-Fi AP-Client etc, please refer to the user's manual in the CD. If you have further questions, please contact the local dealer or distributor where you purchased this product.